


Flash Check®

Jumbo Display Digital Probe Thermometer for Industrial Applications

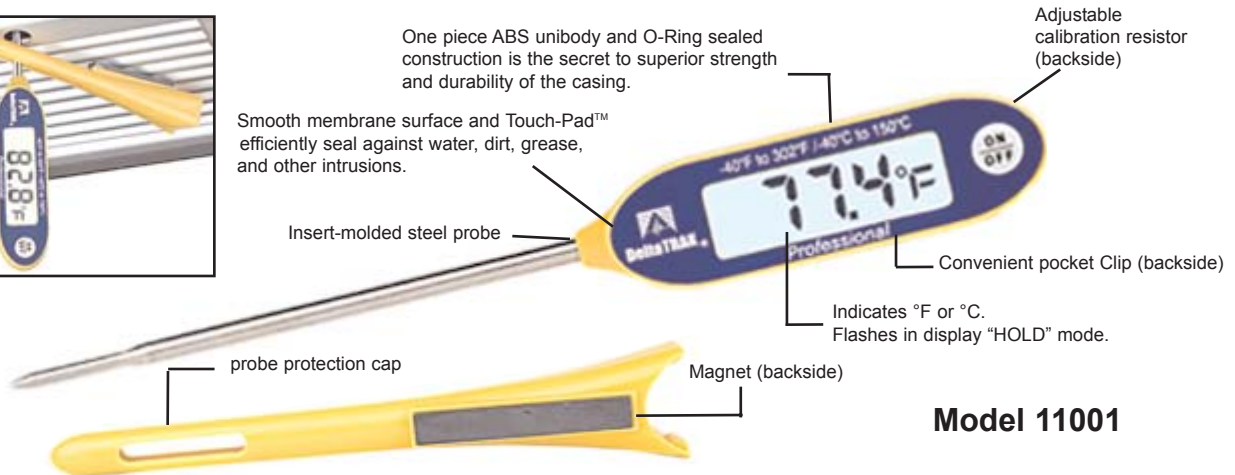

Model 11001

This unique, next-generation, digital pocket probe thermometer is engineered to set the industry standard for accuracy, durability and readability. It is designed and constructed under exacting standards to meet and exceed the specifications required for commercial and industrial uses.

- Highly visible dual scale **JUMBO LCD** display
- Reduced tip probe that provides **300% FASTER** response time
- Probe cover with a **MAGNET** designed to attach thermometer to a vent
- Pocket clip that has an integrated screwdriver for **FIELD CALIBRATION**
- Velcro strap **INCLUDED** to **SECURE THERMOMETER** to refrigerant pipes
- **IP56 RATED** for water, dirt & grease resistant
- **HIGH VISIBILITY** yellow casing

PATENT NO. 5,709,476



Temperature Range	-40°F to 302°F (-40°C to 150°C)
Accuracy	±1°F (-4°F to 194°F), ±0.5°C (-20°C to 90°C); otherwise ±1.8°F (±1°C)
Resolution	0.1°F (0.1°C)
Display Size/Update	1.5" x 0.5" (38mm x 12.7mm)/Every 2 Seconds
Waterproof Rating	IP56
Probe Length and Tip Diameter	Stainless steel probe, 3.9 +/- 0.004 in. (99 +/- 0.1mm); Reduced probe tip 0.1 in. (2.3mm) diameter
Body/ Dimensions	Polycarbonate & ABS/ 6.98 in. (177.3mm) long
Calibration	Field calibratable. NIST traceable calibration certifiable.
Compliance Certificate	Manufacturers certificate of compliance available from DeltaTRAK
Battery	1.5V Button

02/07 Rev. 1.1



DeltaTRAK®
P.O. Box 398 • Pleasanton CA 94566

1-800-962-6776

• **www.deltatrak.com**

• (925) 249-2250 • Fax (925) 249-2251