


# PRODUCT SPECIFICATIONS

## Flash Check® Jumbo Display Digital Probe Lab Thermometer

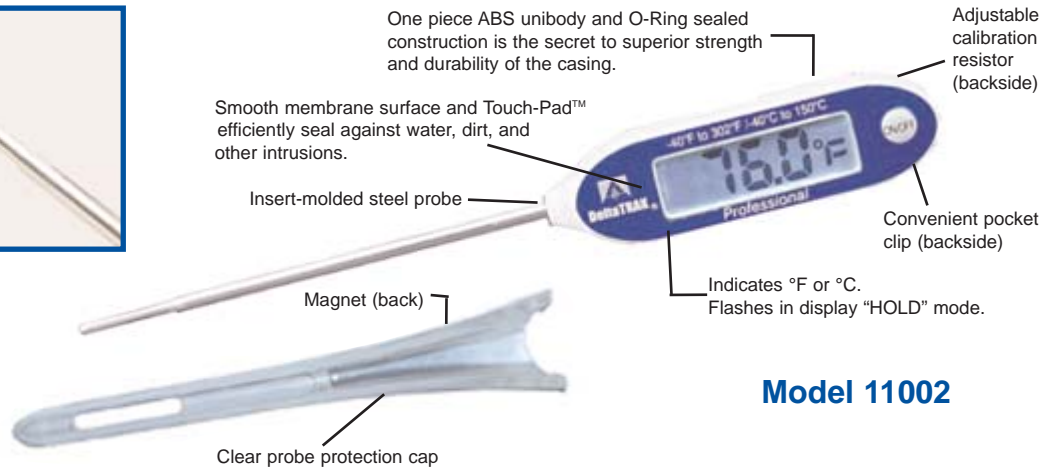

This unique, next generation, jumbo display digital probe thermometer is engineered to set the industry standard for accuracy and durability.

### Ideal for scientific, laboratory and veterinary use!

- Highly visible dual scale **jumbo LCD** Display
- Reduced tip probe that provides **300% faster response time**
- Small stainless steel **round tip probe** (0.1 in/2.3mm diameter)
- Pocket clip that has an integrated screwdriver for **field calibration**
- Water resistant** and washable

PATENT NO. 5,709,476



Temperature Range	-40°F to 302°F (-40°C to 150°C)
Accuracy	± 1.0°F (20°F to 194°F) ±0.5°C (-7°C to 90°C) Otherwise ±1.8°F (±1°C)
Display Resolution	0.1°F (0.1°C)
Environmental Operating Range	14°F to 140°F (-10°C to 60°C)
Waterproof Rating	IP56
Display Size/Update	1.5 in(W) x 0.5 in (H) (38mm x 12.8mm)/ Every 2 seconds
Probe Length and Tip Diameter	3.9 ± 0.004 in(99 ± 0.1mm), tip diameter: 0.1 in (2.3mm)
Body/Dimensions	Polycarbonate and ABS plastics/6.98 in (177.3mm) long
Battery (Type / Life)	1.5 volt size LR44 button alkaline or equivalent / 3,000 hours typical usage
Calibration	Field calibration by variable resistor
Certification	CE Mark, N.I.S.T. traceable by lot

Rev 03/29/07



**DeltaTRAK®**  
P.O. Box 398 • Pleasanton CA 94566 •

**1-800-962-6776 • www.deltatrak.com**

(925) 249-2250 • Fax (925) 249-2251